



0011100101010010101000101

00111001010100101010001010101000100101010


Keep in Touch

Interactive AD display



scanmagnetics.com

DIGITAL SIGNAGE : MEDIA PLAYERS

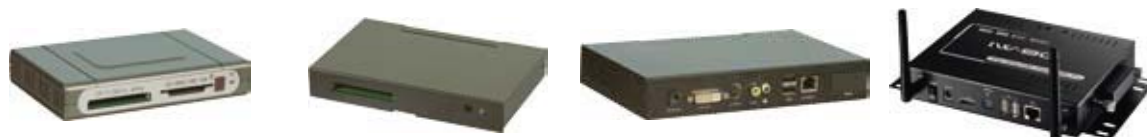

Model No.	DMP-2	DMP-3	MSS-300*	D8-M1**
Video Output	VGA / CVBS / S-Video Component (option)	Component / VGA CVBS (option)	VGA / CVBS / S-Video / DVI-I	VGA / CVBS / S-Video / Component
Audio Output	Stereo Phone Jack	Stereo Phone Jack	Stereo Phone Jack	Stereo RCA Jack
Storage Media	CF (type I, II) / IBM Micro Drive / SM / MMC / SD / MS	CF (type I, II) / IBM Micro Drive	512MB CF (embedded) 2.5" HDD (option)	CF (type I, II) 2.5" HDD (option)
I/O Interfaces	N/A	N/A	USB 2.0 Ethernet 10/100 Mbps Wireless 802.11b/g (option)	USB 2.0 Ethernet 10/100 Mbps Wireless 802.11b/g (option)
Support Media Format	Photo JPEG / BMP Audio MP3 Video MPEG-1 / MPEG-2 / MPEG-4 SP	Photo JPEG / BMP / TIFF / PNG / GIF Audio MP3 / AAC / WMA Video MPEG-1 / MPEG-2 / MPEG-4 SP	Photo JPEG / BMP Video MPEG-1 / MPEG-2 / MPEG-4	Photo JPEG Audio MP3 / WMA / AC3 Video MPEG-1 / MPEG-2 / MPEG-4 / WMV9 / ISO
Media Support	SD 480p	JPEG 720p Video 480p****	SD 480p	HD 1080i
Operation Temperature***	0 ⁰ - 40 ⁰	0 ⁰ - 40 ⁰	0 ⁰ - 40 ⁰	0 ⁰ - 40 ⁰
Power Consumption	3W	3W	5W	5W
Power Source	DC 5V	DC 5V	DC 12V	DC 12V

Note: * Include MSO Plus management software.

** Provide control SDK API.

*** Humidity condition: non-condensing

*** Up-conversion to 720p, via component

DIGITAL SIGNAGE : Integrated SCREEN/MEDIA PLAYER



Model No.	FP0700	FP0700-T	FP1010	FP1010-T	FP1560	FP1560-T
Screen Size	7"	7"	10.2"	10.2"	15.6"	15.6"
Number of Pixels	800 x 480	800 x 480	800 x 480	800 x 480	1366 x 768	1366 x 768
Aspect Ration	16:9	16:9	16:9	16:9	16:9	16:9
Brightness	300 cd/m ²	300 cd/m ²	350 cd/m ²	350 cd/m ²	250 cd/m ²	250 cd/m ²
Contrast Ratio	500:1	500:1	300:1	300:1	500:1	500:1
Response time	10ms	10ms	15ms	15ms	8ms	8ms
Viewing Angle	V:120° / H:140°	V:120° / H:140°	V:110° / H:130°	V:110° / H:130°	V:65° / H:90°	V:65° / H:90°
Speaker	2W x 2	2W x 2	2W x 2	2W x 2	3W x 2	3W x 2
Support Media Format	Photo JPEG / BMP Audio MP3 Video MPEG-1 / MPEG-2 / MPEG-4 SP	Photo JPEG / BMP Audio MP3 / AAC / WMA Video MPEG-1 / MPEG-2 / MPEG-4 / H.264 BP	Photo JPEG / BMP Audio MP3 / AAC / WMA Video MPEG-1 / MPEG-2 / MPEG-4 / H.264 BP	Photo JPEG / BMP Audio MP3 / AAC / WMA Video MPEG-1 / MPEG-2 / MPEG-4 / H.264 BP	Photo JPEG / TIFF / PNG / BMP / GIF Audio MP3 / AAC / WMA Video MP3 / AAC / WMA Video MPEG-1 / MPEG-2 / MPEG-4 SP	Photo JPEG / BMP Audio MP3 / AAC / WMA Video MPEG-1 / MPEG-2 / MPEG-4 / H.264 BP
Power Consumption	11W	6W	7W	7W	20W	20W
Power Source	DC 12V	DC 12V	DC 12V	DC 12V	DC 12V	DC 12V
Operation Temperature*	0° - 40°	0° - 40°	0° - 40°	0° - 40°	0° - 40°	0° - 40°
Overall Dimensions	190x140x35mm	190x140x35mm	260x190x40mm	260x190x40mm	388x281x45mm	388x281x45mm
Weight	1.2kg	1.2kg	1.4kg	1.4kg	3.6kg	3.6kg
Mounting Option	VESA 50x50mm	VESA 50x50mm	VESA 50x50mm	VESA 50x50mm	VESA 100x100mm	VESA 100x100 mm

Note: all model motion detect function option

* Humidity condition: non-condensing

DIGITAL SIGNAGE : SCREENS



Model No.	L19WN73TG	L22WP73TM
Screen Size	19"	22"
Number of Pixels	1440 x 900	1680 x 1050
Aspect Ration	16:9	16:9
Brightness	300 cd/m ²	300 cd/m ²
Contrast Ratio	850:1	700:1
Response Time	5ms	5ms
Viewing Angle	V:160° / H:170°	V:160° / H:170°
Speaker	3W x 2	3W x 2
Power Consumption	48W	60W
Power Source	AC 100~240V	AC 100~240V
Operation Temperature*	0° - 40°	0° - 40°
Overall Dimensions	481 x 73 x 381 mm	536 x 73 x 418 mm
Weight	6 kg	7 kg
Mounting Option	VESA 75x75mm	VESA 75x75mm

Note: *Humidity condition: non-condensing