

X-keys[®] SE Controller USB Specifications (XPJ-06-USB)




- Patented Moving Dielectric Measurement (MDM™) joystick for precision control
- Includes X-keys Macro Works Software
- Rugged construction
- Accurate and reliable control

The *X-keys Controller* uses X-keys Macro Works software to record any sequence or combination of keystrokes from a standard keyboard and assign them to any key or control on the X-keys. Mouse commands (click, scroll, cursor movement), and joystick buttons may also be programmed. Adjustable back-lighting makes key legends readable in low light working environments.

Developers can gain exclusive access to all keys and controls with help from our free software development kit. The X-keys Controller may also be operated in Memory Resident Mode, saving all programming in onboard non-volatile memory.

Specifications

Operating System	Windows 98SE, Me, 2000, XP
Included Software	Macro Works (required for programming and operation)
Joystick Control	Programmable X, Y and infinite Z axis (rotating the stick changes Z axis value from 0-256 every 360°)
Switch Type	Cherry type MX mechanical switch, 3/4" (19 mm) on center, silent tactile feel
Number of Keys	46 single keys
Key Cap Type	5/8" (16 mm) sq. w/removable clear caps for easy labeling (fits Cherry MX switch)
Connector	USB "A"
Dimensions	Body: 9" x 8" x 1" (230 mm x 200 mm x 25 mm) Joystick: 3/8" (10 mm) dia. handle, 1-1/8" (29mm) shaft
Weight	17½ oz. (620 grams)
Power Source	USB port, nominal voltage = 5 vdc
Power Consumption	Low power USB device -- with back-lighting off: less than 15 ma @ 5 vdc -- with back-lighting on highest setting: less than 90 ma @ 5 vdc
Accessories Included	Double-keys (one horizontal and two vertical), key puller
Optional Accessories	Large 1-3/8" (35 mm) square keys (replace 4 single keys), additional double-keys
Certifications	FCC class B, CE Pending
In Memory Resident Mode	
Hardware System	Any architecture supporting USB, including Sun, SGI, and HP workstations
Operating System	Programming requires driver (included) for Windows 98, Me, 2000, XP. Operates on any OS supporting USB including Unix, Sun and Mac OS-X
Joystick	Installs as USB compatible joystick with X, Y, and Z axis
Memory Capacity	Each key is allocated 3 characters and a pool of 900 additional keystrokes is available to any keys that require additional characters
Memory Type	EEPROM, non volatile memory (X-keys retains memory for over 200 years)
Number of Layers	2 layers – user selectable toggle and/or shift keys

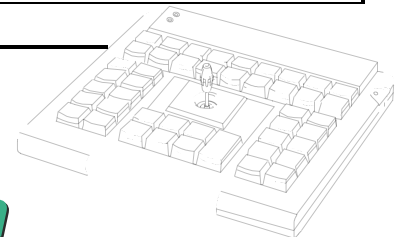

scanmagnetics.com

X-keys® MWII Jog & Shuttle Pro USB Specifications (XPS-08-USB)



- *Designed for professional digital video editors using a non-linear editing program*
- *Jog control makes frame by frame selection of edit points precise and intuitive*
- *Shuttle wheel has 14 programmable zones*
- *Includes X-keys MacroWorks II Software*

The **X-keys® MWII Jog & Shuttle Pro** uses X-keys Macro Works software to record key commands from the keyboard and send them to applications on the computer. Any sequence or combination of keystrokes from a standard keyboard may be assigned to any key or control on the X-keys. Mouse commands (click & scroll) may also be programmed.


Simple, intuitive steps allow even non-technical users to program the X-keys instantly. Programming files may easily be copied and shared.

Adjustable back-lighting makes key legends readable in low light working environments. Developers may use our special HID input mode to gain exclusive access to all 46 keys, the layer indicator LEDs, the programming switch, and jog and shuttle data. A software development kit is available.

Specifications

Operating System	WINDOWS: 2000, XP, Vista MAC: OSX
Included Software	WINDOWS: MacroWorks II MAC: iKey for X-keys (Mac)
Jog Control	10 detent, independent clockwise and counter clockwise commands
Shuttle Control	Independent macros for left and right with increasing repeat rate moving away from center (spring return to rest)
Switch Type	Cherry type MX mechanical switch, 3/4" (19 mm) on center, silent tactile feel
Number of Keys	46 single keys
Key Cap Type	5/8" (16 mm) sq. w/removable clear caps for easy labeling (fits Cherry MX switch)
Connector	USB "A"
Dimensions	Body: 9" x 8" x 1" (230 mm x 200 mm x 25 mm)
Weight	17½ oz. (620 grams)
Power Source	USB port, nominal voltage = 5 vcd
Power Consumption	Low power USB device -- with back-lighting off: less than 15 ma @ 5 vdc -- with back-lighting on highest setting: less than 90 ma @ 5 vdc
Accessories Included	Double-keys (one horizontal and two vertical), key puller
Optional Accessories	Large 1-3/8" (35 mm) square keys (replace 4 single keys), additional double-keys
Certifications	FCC class B, CE pending

Specifications subject to change without notice

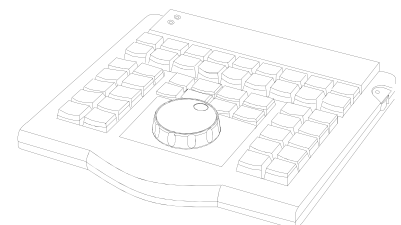

scanmagnetics.com

USB Programmable Devices Product Manual for USB X-keys



Jog & Shuttle +46 Keys


Designed, Manufactured and Sold by:



P.I. Part # 1760

Box Contents – This package contains: 1- X-keys Device, 1- Installation CD, 1- Product Manual (this page), 2 - Vertical Double-keys, 1 - Horizontal Double-key, 1 - Key-puller, 1- Preprinted Legend Sheet and 1- Blank Legend Sheet.

X-keys Quick Start

Run the installation program from the enclosed disc before plugging in your X-keys Desktop. After installation, the X-keys MWII Icon  will appear in your Windows Taskbar. Plug in the X-keys and wait for Windows New Hardware Wizard to complete the installation.


Watch the demonstration video and tutorials on the installation disc or consult the MWII Help Menu for more tips and information.

Should you encounter difficulty installing any of our X-keys products, please check the troubleshooting guide on our web site (www.xkeys.com). If this does not resolve the issue, you may E-mail our technical support department: tech@xkeys.com or call our support desk: (517) 655-5523.

Compatibility – X-keys USB devices require MacroWorks II for Windows 2000, XP, and Vista. For older versions of Windows, please refer to our website (www.xkeys.com). For Mac OS-X we offer iKey for X-keys software. Both programs are included on the installation disk and are free of charge. X-keys USB devices also have a “Boot Mode” which gives them the ability to mimic a USB keyboard and mouse on any USB enabled operating system (including Linux) after they have been programmed. Learn more about Boot Mode on our web site (www.xkeys.com) or contact our Technical Support Department: tech@xkeys.com.

Identifying the Keys – Use the included legend sheets to select appropriate icons or print legends for your keys. The keycaps snap off with a fingernail or small screwdriver. Apply the label under the keycap, and replace it. To print legends on a laser or inkjet printer, go to our web site (www.xkeys.com) for templates formatted for popular applications. The key caps hold a legend 0.575" wide and 0.5" high (14.6mm x 12.7mm).

Horizontal and Vertical Double-keys – The included double-keys replace two single keys on the X-keys. To install a double key cap, remove two adjacent keys with the provided key-puller by positioning the key-puller teeth under the key and pulling straight up on the key cap. Press the double-key in place over the two exposed switch stems.

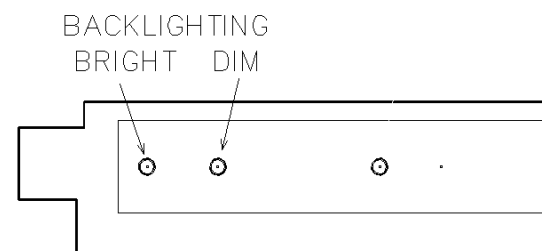

Back Panel

scanmagnetics.com

Backlighting

Macro Works allows the user to program a key to turn backlighting on or off. In addition to this, the LEDs may be dimmed via recessed buttons on the back panel. This setting may also be used to turn the backlighting off for those users who don't require it.

How to Contact Us

Scanmagnetics oy | Finland | Tel : 09 271 2200 | Fax: 09 271 2210 | Eml: xkeys @ scanmagnetics.com



FCC Declaration of Conformity

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instruction manual may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio TV technician for help.

Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

LIMITED WARRANTY -- For all X-keys products purchased and installed in the United States and Canada, P.I. Engineering warrants that the X-keys product will be free from defects in materials and workmanship under normal use and service, and will meet the specifications presented by P.I. Engineering at the time of original purchase, for one year as evidenced by a copy of the purchase receipt. Under this warranty, P.I. Engineering will, at its sole option, repair or replace any X-keys product which is defective, provided that you are responsible for (i) the cost of transportation of the product to P.I. Engineering or its designated service facility, and (ii) any loss or damage to the product resulting from such transportation.

Upon discovery of a defect in the product within the Warranty Period, you should notify P.I. Engineering Technical Support via telephone to obtain an RMA (return authorization number) and instructions for shipping the product to a service location designated by P.I. Engineering. You should send the product, shipping charges prepaid, to the designated location, accompanied by the return authorization number, your name, address, and telephone number, proof of purchase, and a description of the defect. P.I. Engineering will pay for return of product(s) to the customer.

P.I. Engineering shall have no responsibility to repair or replace the X-keys product if the failure has resulted from accident, abuse, mutilation, misuse, or repair/modification performed by any entity other than P.I. Engineering.

THIS WARRANTY IS EXCLUSIVE OF ALL OTHER WARRANTIES, WHETHER EXPRESSED, IMPLIED, OR STATUTORY. P.I. ENGINEERING DOES NOT WARRANT THIS X-keys PRODUCT FOR FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY. P.I. ENGINEERING AND ITS EMPLOYEES SHALL NOT BE HELD LIABLE FOR ANY CONSEQUENTIAL, INDIRECT, OR INCIDENTAL DAMAGES, EVEN IF ADVISED OF THEIR POSSIBILITY, ARISING OUT OF THE USE OR INABILITY TO USE THIS PRODUCT. SOME STATES DO NOT ALLOW FOR THE EXCLUSION OR LIMITATION OF CERTAIN LIABILITIES, SO THE ABOVE LIMITATIONS MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER LEGAL RIGHTS WHICH VARY FROM STATE TO STATE.

In the event that the above limitations are held unenforceable, P.I. Engineering's liability for any damages to you or to any party shall not exceed the purchase price you paid, regardless of the form of any claim.

This limited warranty is valid for and only applies to products purchased and used inside the United States (and its territories) and Canada.

This limited warranty is governed by the laws of the United States of America and the state of Michigan.

X-keys Electronic design: P.I. Engineering, Inc., Williamston, Michigan

X-keys Pro & Desktop industrial design: Rienhold Weiss Design, Chicago, Illinois

Patent # 4964075

© 2007 P.I. Engineering, Inc. All rights reserved.

Y-mouse, Y-see two, Y-key key, X-keys, and the "P.I. Eclipse" are trademarks of P.I. Engineering, Inc.
PS/2 is a registered trademark of International Business Machines, Inc.

All other trademarks are property of their respective owners.

www.piengineering.com www.xkeys.com www.ymouse.com www.raildriver.com
www.trainmaster.com

scanmagnetics.com